


maxiflex 50,5/400
(164' - 13' uprights)

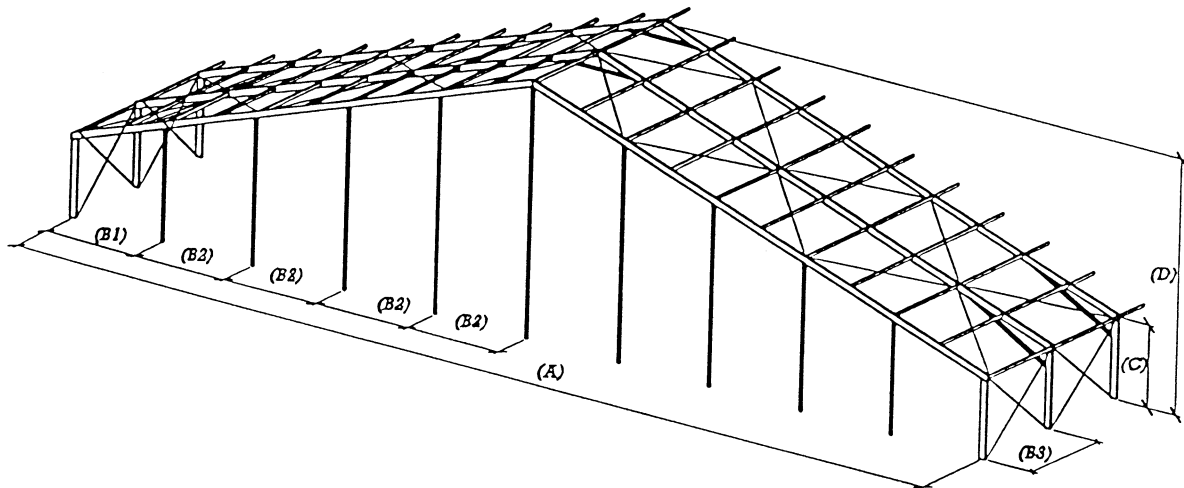

A) Width:	50.18 m (164' 7 9/16")
C) Eave height:	3.80 m (12' 5 5/8")
D) Ridge height:	11.95 m (39' 2 1/2")
B1) Gable truss	5.09m (16' 8 3/8")
B2) Gable truss	5.00m (16' 4 7/8")
B3) Truss distance:	5.00m (16' 4 7/8")
Rafter profile:	120 x 300 mm (4 3/4" x 11 13/16")
Gable profile:	120 x 150 mm (4 3/4" x 5 7/8")
Gable profile:	120 x 200 mm (4 3/4" x 7 7/8")
Center Gable profile:	120 x 250 mm (4 3/4" x 9 13/16")
Ridge & eave purlin:	100 x 140 mm (3 15/16" x 5 1/2")
Intermediate purlin:	80 x 80 mm (3 1/8" x 3 1/8")
Roof slope:	18 degrees